


Detectable MULETAPE®

DT Series - 22 gauge conductor

Description

Flat, woven, polyester tape with insulated metallic conductor enables detection of all-dielectric cables and empty conduit.

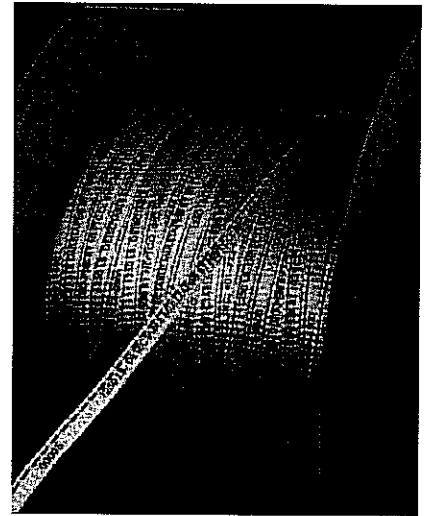

Features & Benefits

- ▲ Lubricated for easy installation and reduced friction
- ▲ Durably printed with sequential footage or meter markings*
- ▲ Available in a variety of tensile strengths
- ▲ Low elongation for enhanced worker safety
- ▲ Lightweight and easily blown into conduit or innerduct
- ▲ Packaged on sturdy wooden or plastic reels
- ▲ Easily spliced using conventional methods or the MULEKNOT™
- ▲ Corrosion-resistant conductor functions at a wide range of frequencies and is compatible with any standard transmitting/receiving equipment
- ▲ NEPTCO Detectable MULETAPE identification tags included with every reel

Please refer to NEPTCO's applications bulletin on grounding and splicing Detectable MULETAPE.

Please refer to NEPTCO's applications bulletin for instructions on splicing using a MULEKNOT.

DETECTABLE MULETAPE PRODUCT ORDERING INFORMATION

PRODUCT	STRENGTH		TYPICAL BOWLINE STRENGTH		TYPICAL MULEKNOT STRENGTH		APPROX. WIDTH
	lbs	(kg)	lbs	(kg)	lbs	(kg)	
DT400P	400	(182)	190	(86)	300	(136)	1/4"
DT900P	900	(409)	480	(218)	770	(350)	1/2"
DT1250P	1250	(568)	760	(345)	900	(409)	1/2"
DT1800P	1800	(818)	830	(377)	1400	(636)	5/8"
DT2500P	2500	(1136)	1300	(591)	1800	(818)	3/4"

Minimum reel length = 3,000 ft. (1 km)

* All products are also available unprinted

PLEASE SEE REVERSE SIDE FOR ADDITIONAL INFORMATION

