

COWO



Customer Wall Outlet

COWO is a fiber optic customer outlet that allows easy and unobtrusive termination of fiber optic cables in an office, home or communications room.

Features

- Accommodates two termination/splice connections
 - 2 SC simplex or 1 LC duplex adapters
 - 2 crimp, mechanical or heat shrink splices
- IP20 rated
- Very flat design, mounts on a standard flush mount electrical outlet
- Utilizes reduced bend radius fiber (G657.A and B)
- Possibility to invert the adapter in the holder to prevent disconnection when pulling the patch cords
- RoHS compliant
- Conforms to UL 94 V-0
- Lockable with screw or lead-wire seal
- Cable entrance from the bottom, left and rear
- Made of molded plastic (halogen free, LSZH-1), white (RAL 9010)

Technical data

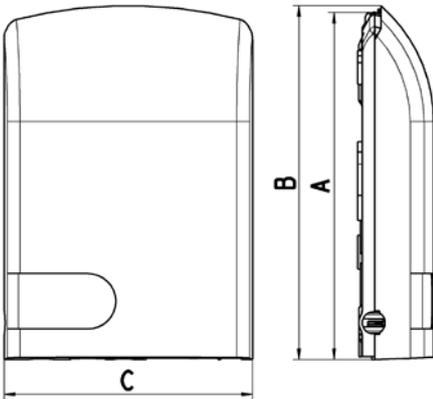

A	112
B	115
C	80
D	24,5

Number of input cable positions	4
Input cable diameter	3-7 mm
Max. capacity	2 fibers
Max. number of customer feeds	2 patch cords
Operating temperature	-40°C to +70°C
Material	PC-FR

Ordering Information

COWO - XX X X

Connector type

S1	SC/UPC
S2	SC/APC
L1	LC/UPC
L2	LC/APC

Number of pigtails

0
1
2

Number of adapters

1	1 SC simplex or 1 LC duplex
2	SC simplex only

COWO will always be delivered with at least one adapter.

For more technical options and order quantity information, please consult your local sales representative.

Accessories

For cable splicing, a strain relief can be installed instead of an adapter at the same position.

- FTX-7029 1 900-30 Strain Relief for TWO cables up to 3,0mm diameter
- FTX-7029 1 900-50 Strain Relief for ONE cable up to 4,2mm diameter

- Bracket for easily mounting on a wall without opening the outlet.
EH8508-000 COWO-BRACKET-WALL-01-(10)