



## High Density LSX 288-Position Panel

### Termination and Termination/Splice Configurations

---

CommScope introduces the new high-density LSX 288-position panel available preterminated with intrafacility (IFC) or outside plant (OSP) cables or in termination and splice configurations. CommScope's 288-position LSX panel (with either SC or LC) offers integrated vertical cable guides (VCG's) within the panel, as well as on each side of the panel. VCG's effectively segregate cables, aiding in easy-to-follow routing paths. The angled bulkhead style panel offers additional protection from bends that can increase attenuation and loss.

### Features

- Integrated cable management
- Angled bulkhead panel
- Vertical cable guides
- Available in SC and LC connector styles and multiple fiber cable styles
- 288 terminations using either SC or LC connectors

# High Density LSX 288-Position Panel

## Termination and Termination/Splice Configurations

### Preterminated Panels

#### Specifications

**Port Count:** 288

**Rack Units:** 6

#### Dimensions (H x W x D)

**Preterminated:** 279 mm x 584 mm x 305 mm (11" x 23" x 12")

**Termination/Splice:** 279 mm x 584 mm x 381 mm (11" x 23" x 15")

#### Cable Length

**Preterminated:** 31 m (100') Standard configuration is two-144-fiber cables

**Termination/Splice:** 12-fiber pigtails

### Ordering Information

Connector style	Cable Type	Cable Length	Catalog Number
SC/APC	Ribbon-Indoor	31 m (100')	LSX-LL/OWA031
SC/UPC	Ribbon-Indoor	31 m (100')	LSX-L7/OWA031
LC/APC	Ribbon-Indoor	31 m (100')	LSX-LM/OWA031
LC/UPC	Ribbon-Indoor	31 m (100')	LSX-LK/OWA031
SC/APC	Stranded-Indoor	31 m (100')	LSX-LL/OWB031
SC/UPC	Stranded-Indoor	31 m (100')	LSX-L7/OWB031
LC/APC	Stranded-Indoor	31 m (100')	LSX-LM/OWB031
LC/UPC	Stranded-Indoor	31 m (100')	LSX-LK/OWB031

### Preterminated Panels for CEV/Customer Premises Locations

#### Ordering Information

Connector style	Cable Type	Cable Length	Catalog Number
SC/APC	Ribbon DieI- OSP	31 m (100')	LSX-LL/OWC031
SC/UPC	Ribbon DieI- OSP	31 m (100')	LSX-L7/OWC031
LC/APC	Ribbon DieI- OSP	31 m (100')	LSX-LM/OWC031
LC/UPC	Ribbon DieI- OSP	31 m (100')	LSX-LK/OWC031
SC/APC	Stranded DieI- OSP	31 m (100')	LSX-LL/OWD031
SC/UPC	Stranded DieI- OSP	31 m (100')	LSX-L7/OWD031
LC/APC	Stranded DieI- OSP	31 m (100')	LSX-LM/OWD031
LC/UPC	Stranded DieI- OSP	31 m (100')	LSX-LK/OWD031

Other configurations are available upon request. Please contact CommScope Technical Assistance Center.

## High Density LSX 288-Position Panel

### Termination and Termination/Splice Configurations

#### Termination/Splice Panel



LSX 288-Termination and Splice Panel—Splicing in the rear eliminates rack space for a dedicated splice point.  
Panel is shown here from front vantage (left) and back vantage (right)

CommScope's 288-position LSX panel is also available in a termination and splice configuration. While CommScope recommends off-frame splicing in high-density applications, often floor-space is limited and on-frame splicing is required in a high density environment. In a 18-inch deep frame\*, this panel solution saves the valuable rack space often required for a dedicated splice panel. Panels can be ordered with 12-fiber ribbon or 12-fiber stranded pigtails. Splice trays and cable clamps are included within the panel.

#### Ordering Information

Connector style	Pigtail Type	Splice Type	Catalog Number
SC/APC	Ribbon-Indoor	Mass Fusion	LSX-LL5243-A-SPL
SC/UPC	Ribbon-Indoor	Mass Fusion	LSX-L75243-A-SPL
LC/APC	Ribbon-Indoor	Mass Fusion	LSX-LM5243-A-SPL
LC/UPC	Ribbon-Indoor	Mass Fusion	LSX-LK5243-A-SPL
SC/APC	Stranded-Indoor	Heatshrink Fusion	LSX-LL1242-A-SPL
SC/UPC	Stranded-Indoor	Heatshrink Fusion	LSX-L71242-A-SPL
LC/APC	Stranded-Indoor	Heatshrink Fusion	LSX-LM1242-A-SPL
LC/UPC	Stranded-Indoor	Heatshrink Fusion	LSX-LK1242-A-SPL


Other configurations are available upon request. Please contact CommScope Technical Assistance Center.

\*See page 5 for additional accessories that accommodate the deeper panel.

# High Density LSX 288-Position Panel

## Termination and Termination/Splice Configurations

### High-Density Distribution Solution (using 288-Termination-Only panel)

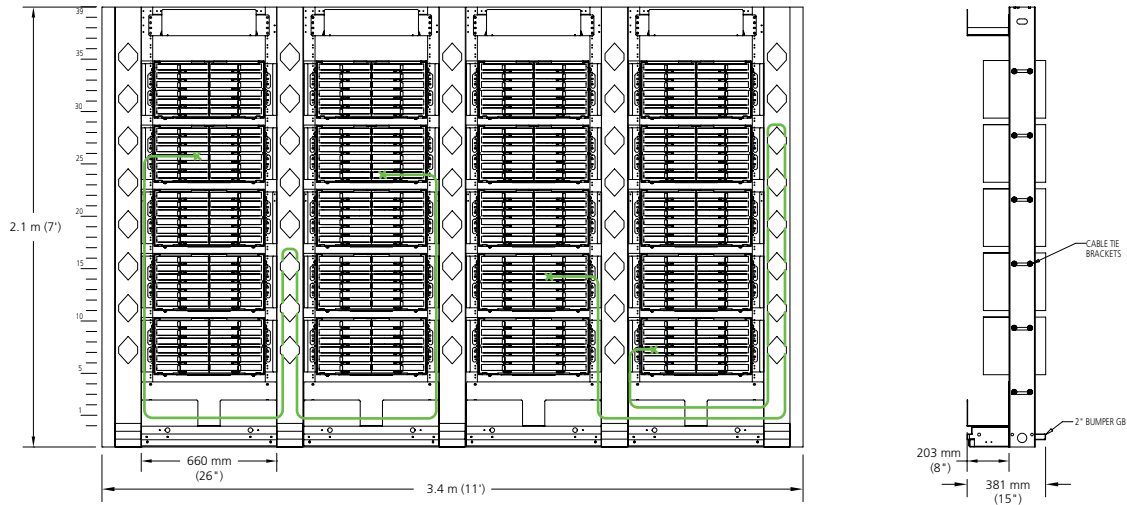

CommScope's recommended fiber frame lineup uses four frames with 2 mm fiber jumpers to maintain the industry standard 2-inch patch cord pile-up

The preterminated LSX-288 solution utilizes a traditional frame designed to fit a variety of termination, splice and storage applications. This front load frame is built to ensure commonality with patch cord routing, slack storage and fiber protection. It is shipped complete with top and bottom troughs. Available accessories include interbay management panels (IMPs).

### Density Recommendations

Panels/Frame	Terminations/Frame	Recommended Maximum Frame Lineup
5	1,440	4 frames (5,760 terminations)

### Recommended Patch Cord Lengths

Number of Frames	Approximate Patch Cord Length
1	5 m (16.4')
2	6 m (19.7')
3	6 m (19.7')
4	7 m (23')


### Ordering Information

Description	Dimensions (H x W x D)	Catalog Number
High-Density Frame (includes 8" deep front troughs)	2.1 m x 660 mm x 381 mm (7' x 26" x 15")	E-501-LGX-HD
Interbay Management Panel (includes 8" deep troughs and spools)	2.1 m x 127 mm x 381 mm (7' x 5" x 15")	E-501-L139-HD
288-Termination-Only Distribution Panel	279 mm x 584 mm x 305 mm (11" x 23" x 12")	Refer to previous pages for catalog numbers
End Guard	2.1 m x 64 mm x 381 mm (7' x 2.5" x 15")	RAC-7B0162

# High Density LSX 288-Position Panel

## Termination and Termination/Splice Configurations

### High-Density Distribution Solution (using 288-Termination/Splice panel)

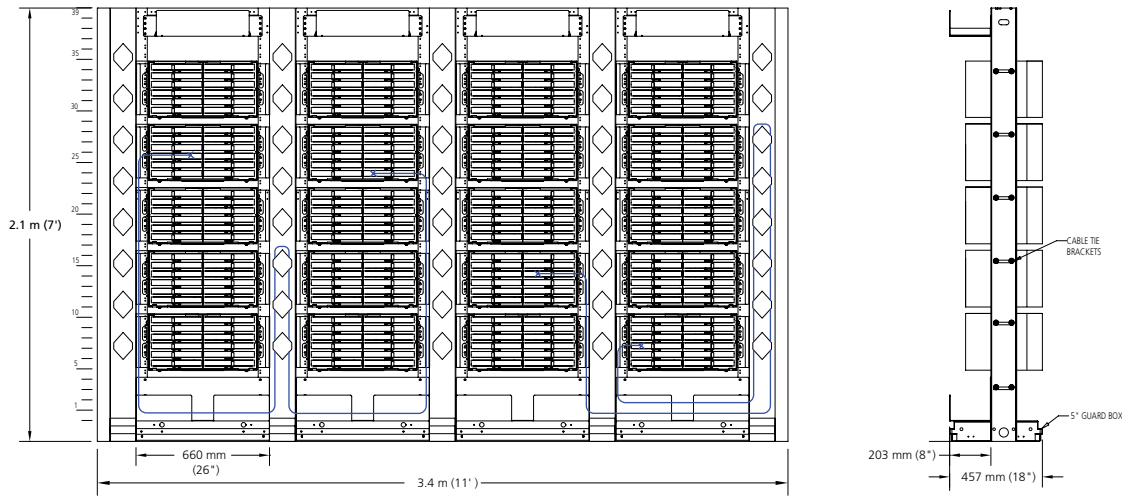

CommScope's recommended fiber frame lineup uses four frames with 2 mm fiber jumpers to maintain the industry standard 2-inch patch cord pile-up

The termination and splice LSX-288 solution utilizes a traditional frame designed to fit a variety of termination, splice and storage applications. This front load frame is built to ensure commonality with patch cord routing, slack storage and fiber protection. It is shipped complete with top and bottom troughs. Available accessories include interbay management panels (IMPs).


### Ordering Information

Description	Dimensions (H x W x D)	Catalog Number
High-Density Frame (includes 8" deep front troughs)	2.1 m x 660 mm x 381 mm (7' x 26" x 15")	E-501-LGX-HD
Frame Rear Guard Box (rear 2-inch bumper should be removed and replaced with this item)	660 mm x 127 mm (26" x 5")	RAC-0X0439
Interbay Management Panel (includes 8" deep troughs and spools)	2.1 m x 127 mm x 381 mm (7' x 5" x 15")	E-501-L139-HD
Interbay Management Panel Rear Guard Box (rear 2-inch bumper should be removed and replaced with this item)	127 mm x 127 mm (5" x 5")	RAC-0X0440
288-Termination/Splice Distribution Panel	279 mm x 584 mm x 381 mm (11" x 23" x 15")	Refer to previous pages for catalog numbers
End Guard	2.1 m x 64 mm x 381 mm (7' x 2.5" x 15")	RAC-7B0162
Universal End Guard Extender	2.1 m x 64 mm x 76 mm (7' x 2.5" x 3")	E-501-12002

# High Density LSX 288-Position Panel

## Termination and Termination/Splice Configurations

### Homerun Splitter Solution

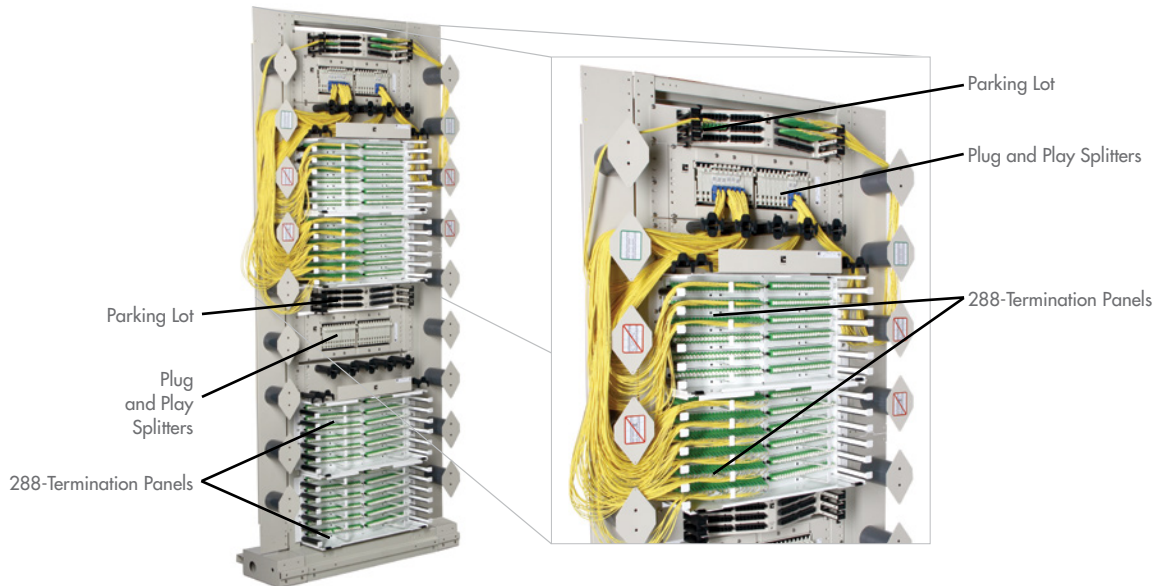

CommScope's homerun splitter solution incorporates the LSX 288-position distribution panel along with plug and play splitter modules for central office splitting. Able to effectively manage 1,152 homes within a seven-foot frame, this solution offers excellent density with CommScope's built-in cable management. In addition, these same plug and play splitter modules are commonly used within CommScope's outdoor Fiber Distribution Hubs (FDHs), allowing for easy-to-manage inventory with one splitter type versatile enough for both inside and outside environments.

### Ordering Information

Description	Dimensions (H x W x D)	Catalog Number
Network Rack with 2" WECO mounting spaces (shipped with 8-inch front guard box)	2.14 m x 660 mm x 381 mm (7' x 26" x 15")	RAC-7A0501
Frame Rear Guard Box*; (rear 2-inch bumper should be removed and replaced with this item)	660 mm x 127 mm (26" x 5")	RAC-0X0439
Interbay Management Panel	2.1 m x 127 mm x 381 mm (7' x 5" x 15")	E-501-1139-HD
Interbay Management Panel Rear Guard Box* (rear 2-inch bumper should be removed and replaced with this item)	127 mm x 127 mm (5" x 5")	RAC-0X0440
End Guard	2.1 m x 64 mm x 381 mm (7' x 2.5" x 15")	RAC-7B0162
Universal End Guard Extender*	2.1 m x 64 mm x 76 mm (7' x 2.5" x 3")	E-501-12002
288-Termination Distribution Panel	279 mm x 584 mm x 305/381 mm (11" x 23" x 12/15")	Refer to previous pages for catalog numbers
Rack Mount Splitter Chassis – accommodates up to 24 plug and play splitters	176 mm x 483/584 mm (7" x 19/23")	FPS-MPPRACKMT24
Cable Management for Rack Mount Splitter Chassis	127 mm x 483/584 mm (5" x 19/23")	FPS-MPPRACKMTCM
Parking Lot Panel for Rack Mounts (accommodates three 1 x 32 splitter outputs)	89 mm x 483/584 mm (3.5" x 19/23")	ACE-ACC200-PKLT3
1 x 32 Plug and Play Splitter Module Plug-in		FPS-MPP1AJJ


\*Used only when termination/splice panel is loaded into frame.

Other configurations are available upon request. Please contact CommScope Technical Assistance Center.

## High Density LSX 288-Position Panel

### Termination and Termination/Splice Configurations

## Outside Plant Controlled Environment Active Cabinet Solution

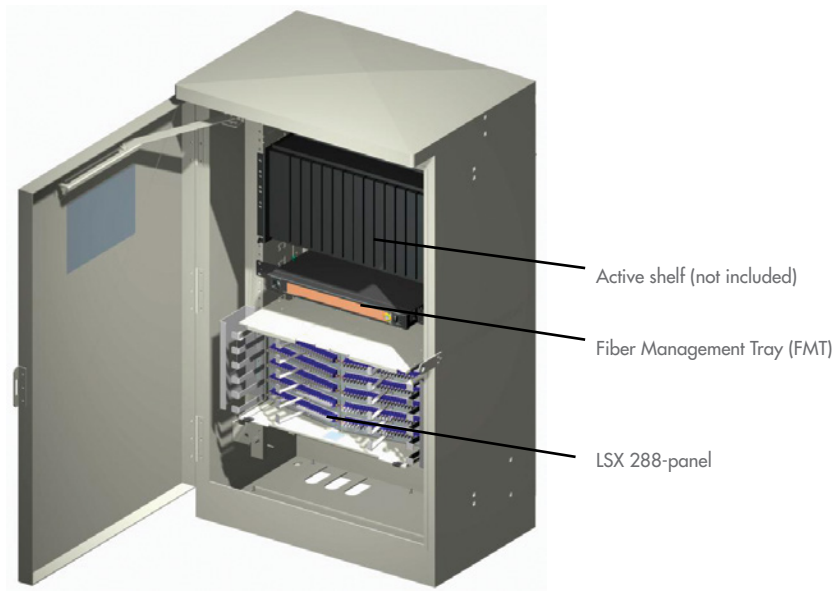

CommScope's LSX-288 panels are also well suited to a controlled environment cabinet where limited rack space and high termination counts are necessary. Used in conjunction with CommScope's Fiber Management Tray and RiserGuide<sup>1</sup> on-demand cable management, this solution can meet both the termination demands, and cable management requirement for a future-proofed network.

## Ordering Information

Description	Dimensions (H x W x D)	Catalog Number
288-Termination or Termination/Splice Distribution Panel	279 mm x 584 mm x 305/381 mm (11" x 23" x 12/15")	Refer to previous pages for catalog numbers
FMT Bulk Storage Drawer	44 mm x 584 mm x 305 mm (1.75" x 23" x 12")	FMT-DBS000000-A00P <sup>2</sup>

<sup>1</sup> For more information on RiserGuide on-demand cable management, see CommScope literature #101573AE.

<sup>2</sup> For more information on Fiber Management Trays (FMTs), see CommScope literature #103743AE.



---

[www.commscope.com](http://www.commscope.com)

Visit our website or contact your local CommScope representative for more information.

© 2015 CommScope, Inc. All rights reserved.

All trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of CommScope, Inc. This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties relating to CommScope products or services.

PS-106370.1-AE (10/15)

**Contact us**

Address:  
P.O. Box 1101, Minneapolis,  
Minnesota, USA 55440-1101

Tel: 1-800-366-3891 Fax: 1-952-917-3237